

Vibrant, strong & non-slip precast rubber tiles

Our rubber tiles are manufactured from recycled rubber waste and cast into vibrant black, green or red tiles which are ideal for use as low level play area flooring, gym flooring, roof tiles and balcony/terrace flooring. The unique manufacture creates a strong, durable, non-slip, weather resistant, low maintenance and easy to install rubber surfacing solution. Despite their toughness, the tiles keep natural drainage routes open to allow air, water and essential nutrients to reach the ground below which is not always the case with other rubber flooring products. The 3 variant colours can be used individually or together to create safe, attractive, stimulating and vibrant flooring solutions.

- RUBBER GRASS MATS
- RUBBER PLAY TILES
- SHED BASES
- STEEL FIXING PINS
- PLASTIC FIXING PEGS
- LAWN & BORDER EDGING
- HOT TUB BASES
- SOAKAWAY CRATES
- GARDEN BUILDINGS
- RUBBER GYM MATTING
- GRASS PROTECTION MESHES
- GRASS REINFORCEMENT MESHES
- GROUND REINFORCEMENT & GRAVEL RETENTION GRID
- GARDEN FURNITURE
- HOT TUBS & SWIM SPAS
- DRIVEWAY DRAINAGE
- LANDSCAPING & WEED CONTROL MEMBRANES



Scan QR code for more info

The Garden Range are dedicated to providing our customers the most accurate details in order for them to make an informed decision on our range. However, there may occasionally be errors or omissions and we reserve the right to amend or remove specifications without notice.

This document was produced in July 2020 and the reliability and accuracy of this data should be checked by the reader prior to design or purchase.




thegardenrange.co.uk



sales@thegardenrange.co.uk



+44 (0)1246 589021

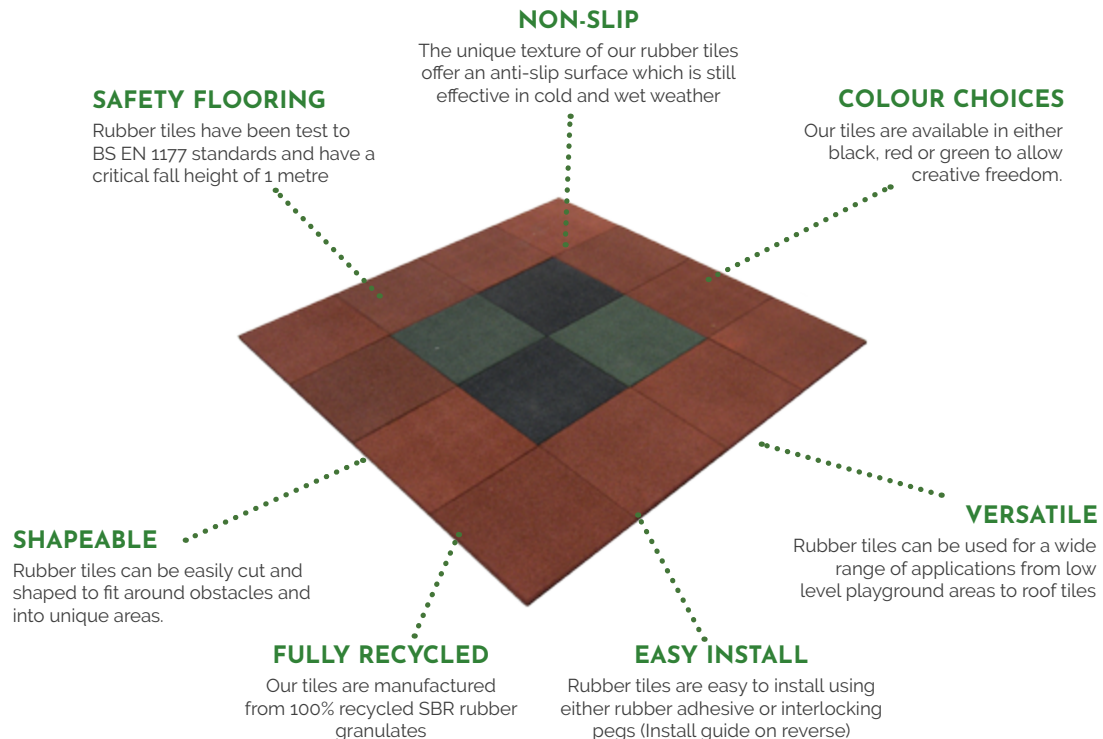

KEY FACTS

- » Tile Length: **500mm**
- » Tile Width: **500mm**
- » Tile Depth: **30mm**
- » Tile Weight: **6kg**
- » Pack Size: **4 Tiles per pack**
- » Tiles to create 1m²: **4 Tiles**
- » Material: **Recycled SBR rubber granulate**
- » Colours: **Black, Red and Green**
- » CFH Rated: **1 Metre**
- » Complies With: **BS EN 1177**

APPLICATIONS



PLAYGROUNDS

Soft, vibrant and with a CFH of 1 metre, rubber tiles are ideal for use around low level play equipment



BALCONIES

Soft, easy to install, UV and rot resistant tiles are ideal for creating long lasting balcony flooring



ROOFS

Rubber tiles can be used to create hard standing and vibrant surfaces for single pitch and flat roofs



HOT TUB BASES

Used as bases for inflatable hot tubs to create a strong, non-slip and soft underfoot spa foundation



GYM & EXERCISE

Rubber tiles can be used to create strong, durable and fatigue reducing flooring for home & commercial gyms



GARDENS

A versatile product which can be used as a paving product ideal for use on paths, patios and more



Installation Instructions

Interlocking Method (For use on a granular base):

1. Prepare your granular sub-base of soil or sand etc. You must ensure that your hardcore is level and well compacted by using a vibration plate.
2. Measure and mark out your area where the tiles will be installed. Install an edging system around the perimeter of where the tiles will be laid to prevent outer edges moving (this can be made from concrete, plastic, timber or rubber).
3. On top of the prepared granular sub-base, start in one corner and lay the tiles one row at a time, connecting and butting together any neighbouring tiles using the interlocking pegs. Push the interlocking pegs half way into the pre-drilled holes of a tile before pushing the next tile onto two of the pegs sticking out and ensure they are pressed tightly together with no gaps visible. Repeat this process of laying one row at a time (either straight or brick-bond for more flexibility) and connecting as you go along until the entire area has been filled.
4. If desired, polyurethane adhesive can be used in the joints of each tile to ensure total integrity and ensure the tiles are fixed sufficiently to prevent migration of materials.

Non-Interlocking Method (For use on a solid base):

1. Prepare your sub-base, concrete or tarmac. Ensure your concrete is seal, fully cured, crack and gap free. Or ensure that your tarmac is hard, flat, dry, fully cured over 30 days and is free of all impurities.
2. Measure and mark out your area where the tiles will be installed. Install an edging system around the perimeter of where the tiles will be laid to prevent outer edges moving (this can be made from concrete, plastic, timber or rubber).
3. Using an appropriate polyurethane adhesive, apply 4 rows of the adhesive to under side of the tile in a 3mm bead. Secure the tile in place and ensure there is a 3-4mm joint between each tile that can be filled with sand or another fine-grade, porous medium which allows for tile expansion over time. Repeat this process until the area has been filled and the tiles are butting with the edging installed earlier.

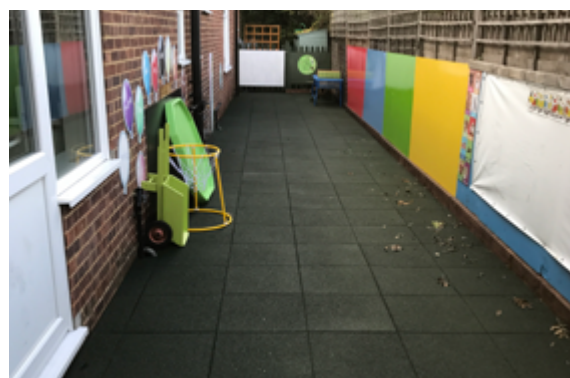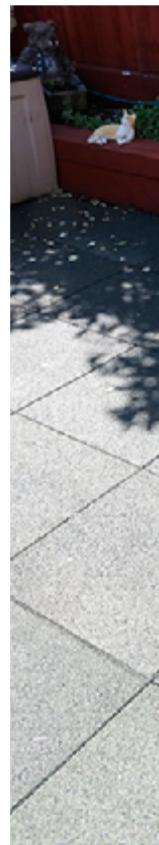

PRODUCT CODE	COLOUR	DESCRIPTION	DEPTH (mm)	TILE DIMENSION (mm)	PACK SIZE	TILE WEIGHT (kg)
2443	Black	Rubber Tile – Black 4pk	30	500 x 500	4	6
2444	Red	Rubber Tile – Red 4pk	30	500 x 500	4	6
2445	Green	Rubber Tile – Green 4pk	30	500 x 500	4	6